



NIMBUS

HPAL - Pendant


Three sizes – 15", 19" and 25" diameter

Heavy gauge aluminum construction for efficient heat dissipation

Decorative aluminum tube and frame rings

High performance prismatic optics provide high levels of vertical illuminance with minimal glare


Polyester powder coat finishes



NIMBUS

HPAL - Pendant

DIMENSIONS

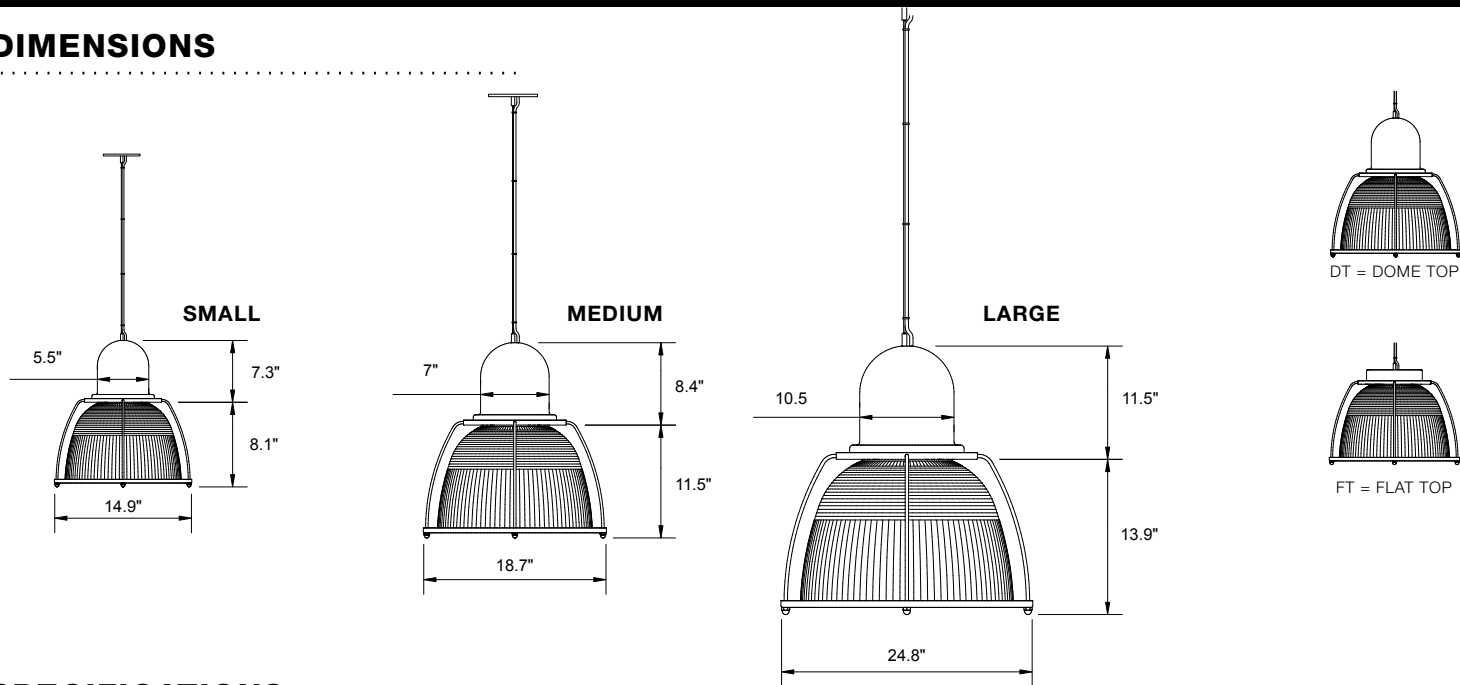

SPECIFICATIONS

SIZES

Small = 14.9" diameter
 Medium = 18.7" diameter
 Large = 24.8" diameter

MOUNTING

Air craft cable, cord, or stem

COLOR

Textured or smooth polyester powder coat finishes
 RAL colors available

BALLASTS

Compact fluorescent = HPF Electronic
 HID = HPF Magnetic

OPTIONS

Consult factory for details

MAXIMUM LAMP TYPE*

	SMALL	MEDIUM	LARGE
Incandescent	100 watts	150 watts	300 watts
Compact fluorescent	2x42 watts	4x42 watts	8x42 watts
High pressure sodium	100 watts	250 watts	400 watts
Metal halide	100 watts	250 watts	400 watts

* Consult technical sheets for specific lamp application

LISTINGS



Damp location luminaire



Listed to applicable CSA and UL standards

ADDITIONAL STYLES



HPGL



HPDL



HP11 - PDR




HP11 - PCL



HP11 - DBR



HP11 - KNST



NIMBUS


HPAL - Pendant

STANDARD FEATURES

- Three sizes - 15", 19" and 25" diameter
- Heavy gauge spun aluminum ballast enclosure for efficient heat dissipation
- Spun aluminum decorative rings
- Aluminum decorative frame
- High performance prismatic optics provide high levels of vertical illuminance with minimal glare
- HPF ballasts
- Standard aircraft cable suspended
- Bottom lenses available attached by spun aluminum lens frame



Damp location luminaire



Designed for Maximum Ambient Temperature of 35 degrees Celsius (95 degrees Fahrenheit) - for other applications please consult factory



Listed to applicable CSA and UL standards




ORDERING CODE GUIDE

SERIES	MODEL	SIZE	STYLE	LAMP	VOLT	COLOR	MOUNTING	OPTIONS
HPAL	500							
		812	DT = dome top FT = flat top ③	INC100 50MH ① 70MH ① 100MH ① 50HPS 70HPS 100HPS PLT70 2 X PLT13TT 2 X PLC18 2 X PLC26 2 X PLT32 2 X PLT42	120 277 347	<u>TEXTURED FINISHES</u> TAL = textured aluminum TBK = textured black TBZ = textured bronze TWH = textured white <u>SMOOTH FINISHES</u> AL = silverdillo BK = black BY = buttercup yellow DBZ = dark bronze DO = deep orange EG = emerald green RB = royal blue RR = rich red WH = white RAL colors available	ACBXX = Black cord & canopy, Specify length ACWXX = White cord & canopy, Specify length. SMXX = Stem & Canopy, Specify Length HHCP-BK = Hook hanger, black cord and plug HHCP-WH = Hook hanger, white cord and plug	CFL = clear flat lens PCR = polycarbonate refractor RMB = remote mount ballast ② QS = quartz socket QRS = quartz relay & socket Coloured lenses are available - please consult factory
		816		INC150 ① 175MH ① 250MH 250HPS 2 X PLT70 4 X 26PLC 4 X 32PLT 4 X 42PLT				
		822		INC300 ① 400MH 400HPS 4 X PLT70 8 X 26PLC 8 X 32PLT 8 X 42PLT				

Notes:

- ① Open luminaire, use with protected lamp or specify CFL or PLL option
- ② Limited availability, consult factory
- ③ Incandescent or remote ballast only




NIMBUS


HPAL - Pendant

DIMENSIONS

DT = Dome top

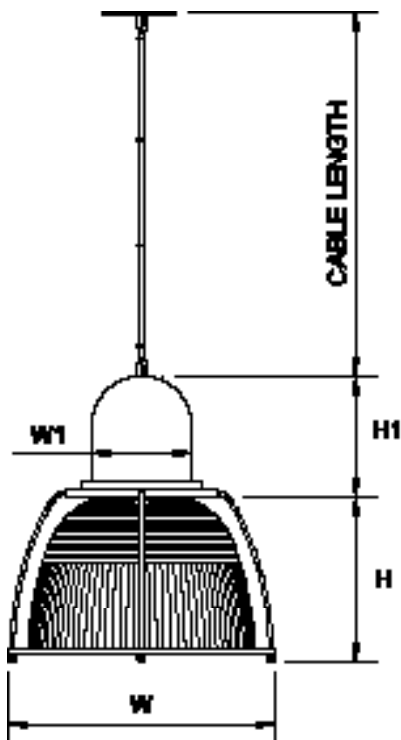

FT = Flat Top
Only with remote ballast
or incandescent

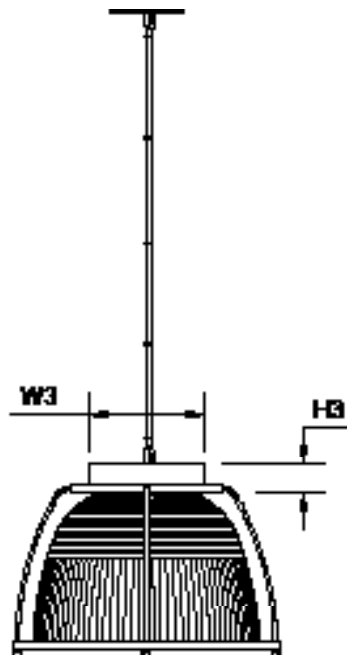

	W	W1	W3	H	H1	H3
Small	Ø14.9"	Ø5.5"	Ø6.0"	8.1"	7.3"	2.0"
Medium	Ø18.7"	Ø7.0"	Ø8.0"	11.5"	8.4"	2.0"
Large	Ø24.8"	Ø10.5"	Ø12.0"	13.9"	11.5"	2.5"