



# CILINDRO

## SMAC

### STANDARD FEATURES

- Spun aluminum housing
- Regressed mounting canopy for fast heat dissipation
- Self-flanged reflector trim
- Die-cast clip and hang wall plate
- Ceiling mount, stem mount or wall arm mount
- Incandescent, compact fluorescent and HID sources
- HPF ballast, magnetic or electronic ballasts



Intertek



SERIES	MODEL	SIZE	LAMP	VOLT	LUMENS	CCT	CONTROL	REFLECTOR	COLOR	OPTIONS
SMAC	900	5"= SMALL 8"= MEDIUM 16"= LARGE	16W	120-277UNV 277-347UNV	2200	3500	0-10V DIM	AC= CLEAR CONE GC= GOLD CONE WC= WHITE CONE BB= BLACK BAFFLE WB= WHITE BAFFLE	TAL: Textured Aluminum TBK: Textured Black TBZ: Textured Bronze TWH: Textured White	MS= MOTION SENSOR RD= REMOTE DIMMING BT= BLUETOOTH EM= EMERGENCY BACKUP PE1= PHOTOCELL 120V PE2= PHOTOCELL 277V CM= CEILING MOUNT WAM= WALL ARM MOUNT SM6= 6" STEM SM12= 12" STEM SM18= 18" STEM SM24= 24" STEM SMCL= CUSTOM STEM LENGTH CFL= CLEAR FLAT LENS
					2265	4000				
					2335	5000				
			88W		11,062	3500				
					11344	4000				
					12187	5000				

### ORDERING INFORMATION

SERIES	MODEL	SIZE	LAMP	VOLT	LUMENS	CCT	CONTROL	REFLECTOR	COLOR	OPTIONS

Consult factory for voltage and other lamp options. Product specifications subject to change without notice.

1. Programmable drivers at the PACE factory
2. Color tunable
3. Capable of remote dimming
4. Can be equipped with motion sensors for on/off functioning
5. Can be equipped with light sensors for dusk-to-dawn automatic on/off operation
6. Bluetooth commissioning sensor capability for Android and iOS

Although PACE has prepared the information contained in this document with all due care, PACE does not warrant or represent that the information is free from errors or omission. Whilst the information is considered to be true and correct at the date of publication, changes in circumstances after the time of publication may impact on the accuracy of the information. The information may change without notice and PACE is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

In the interest of product improvement, Pace reserves the right to make technical and product specification changes without notice. Consult factory for voltage and other lamp options.



# CILINDRO

## SMAC

**SIZES**  
5", 8", 16" diameter

**MOUNTING**  
Wall, ceiling, stem mounts




**COLOR**  
Textured or smooth polyester powder coat finishes  
RAL Colors available

SMAC 5 = Small



SMAC 8 = Medium

SMAC 16 = Large



CM = ceiling mount

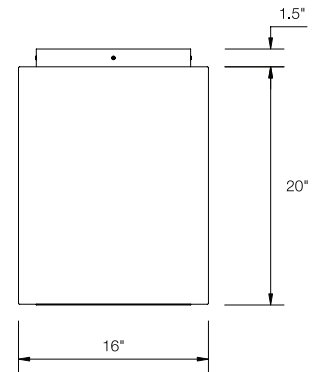

WAM = wall arm mount






Wall arm mount detail



Side View

Canopy Details

ST = stem mount

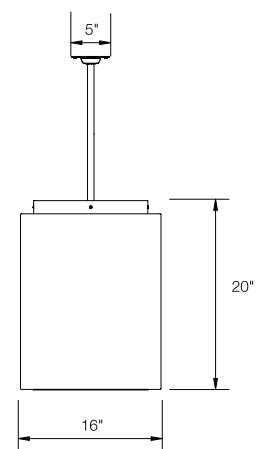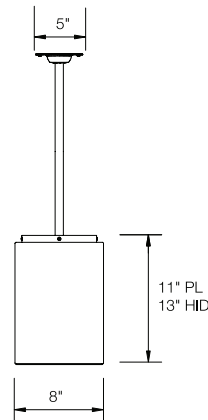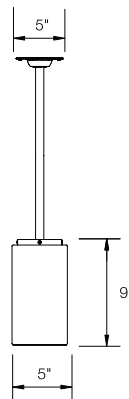

Although PACE has prepared the information contained in this document with all due care, PACE does not warrant or represent that the information is free from errors or omission. Whilst the information is considered to be true and correct at the date of publication, changes in circumstances after the time of publication may impact on the accuracy of the information. The information may change without notice and PACE is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

In the interest of product improvement, Pace reserves the right to make technical and product specification changes without notice. Consult factory for voltage and other lamp options.