

# NIMBUS

## HPAL - Pendant



PROJECT

DATE

COMMENTS

### STANDARD FEATURES

- Heavy Gauge Spun Aluminum Housing
- UV Stabilized Acrylic Reflector
- All Hardware Stainless Steel
- Dimming Driver



| SERIES               | MODEL | SIZE | STYLE                           | LAMP LED | LUMENS | CCT CRI 80                                                           | VOLT        | CONTROL                      | COLOR                                                                                                                                    | MOUNTING                                                                                                                                                                                          | OPTIONS                                                                                                                             |
|----------------------|-------|------|---------------------------------|----------|--------|----------------------------------------------------------------------|-------------|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| HPAL                 | 500   | 812  | DT = Dome Top<br>RT = Round Top | 35W      | 4600   | K27 = 2700K<br>K3 = 3000K<br>K35 = 3500K<br>K4 = 4000K<br>K5 = 5000K | 120/277 UNV | DD = 0-10V Dimming<br>Driver | TAL = Textured Aluminum<br>TBK = Textured Black<br>TBZ = Textured Bronze<br>TWH = Textured White<br>CC = Custom Color<br>RAL = RAL Color | ACBXX = Aircraft Cable Black<br>Cord & Canopy, Specify Length<br>ACWXX = Aircraft Cable White<br>Cord And Canopy, Specify Length<br>SMXX = Stem & Canopy, Specify<br>Length<br>HHCP = Hook Hanger | CFL = Clear Flat Lens<br>SFL= Satinice Flat Lens<br>PCR = Polycarbonate Reflector<br>SC30 = 30° Hang Straight<br>MS = Motion Sensor |
|                      |       | 816  |                                 | 50W      | 5440   |                                                                      |             |                              |                                                                                                                                          |                                                                                                                                                                                                   |                                                                                                                                     |
|                      |       | 822  |                                 | 100W     | 15000  |                                                                      |             |                              |                                                                                                                                          |                                                                                                                                                                                                   |                                                                                                                                     |
|                      |       |      |                                 | 150W     | 22500  |                                                                      |             |                              |                                                                                                                                          |                                                                                                                                                                                                   |                                                                                                                                     |
|                      |       |      |                                 | 200W     | 30000  |                                                                      |             |                              |                                                                                                                                          |                                                                                                                                                                                                   |                                                                                                                                     |
|                      |       |      |                                 | 240W     | 36000  |                                                                      |             |                              |                                                                                                                                          |                                                                                                                                                                                                   |                                                                                                                                     |
|                      |       |      |                                 | 300W     | 39000  |                                                                      |             |                              |                                                                                                                                          |                                                                                                                                                                                                   |                                                                                                                                     |
|                      |       |      |                                 | 400W     | 52000  |                                                                      |             |                              |                                                                                                                                          |                                                                                                                                                                                                   |                                                                                                                                     |
|                      |       |      |                                 | 500W     | 65000  |                                                                      |             |                              |                                                                                                                                          |                                                                                                                                                                                                   |                                                                                                                                     |
| ORDERING INFORMATION |       |      |                                 |          |        |                                                                      |             |                              |                                                                                                                                          |                                                                                                                                                                                                   |                                                                                                                                     |
| SERIES               | MODEL | SIZE | STYLE                           | LAMP LED | LUMENS | CCT CRI 80                                                           | VOLT        | CONTROL                      | COLOR                                                                                                                                    | MOUNTING                                                                                                                                                                                          | OPTIONS                                                                                                                             |
|                      |       |      |                                 |          |        |                                                                      |             |                              |                                                                                                                                          |                                                                                                                                                                                                   |                                                                                                                                     |

ORDERING EXAMPLE: HPAL - 500 - 822 - DT - 100W - 15000 - K4 - 120/277 - DD - TAL - SM24" - PCR

Consult factory for voltage and other lamp options. Product specifications subject to change without notice.

1. Programmable drivers at the PACE factory
2. Color tunable
3. Capable of remote dimming
4. Can be equipped with motion sensors for on/off functioning
5. Can be equipped with light sensors for dusk-to-dawn automatic on/off operation
6. Bluetooth commissioning sensor capability for Android and iOS



PACE Illumination 5500 West 111<sup>th</sup> Street | Oak Lawn, Illinois 60453 | 708-499-1700 | [quotes@paceillumination.com](mailto:quotes@paceillumination.com)

Although PACE has prepared the information contained in this document with all due care, PACE does not warrant or represent that the information is free from errors or omission. Whilst the information is considered to be true and correct at the date of publication, changes in circumstances after the time of publication may impact on the accuracy of the information. The information may change without notice and PACE is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

In the interest of product improvement, Pace reserves the right to make technical and product specification changes without notice. Consult factory for voltage and other lamp options.

REV DATE:  
11-03-2025

# NIMBUS

## HPAL - Pendant



### MOUNTING


- Air craft cable and stem standard

### COLOR


- Textured or smooth polyester powder coat finishes
- RAL colors available

### DIMENSIONS


Small




Medium

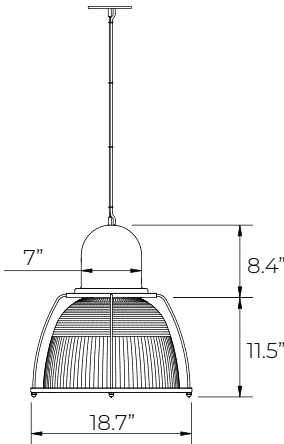


Large

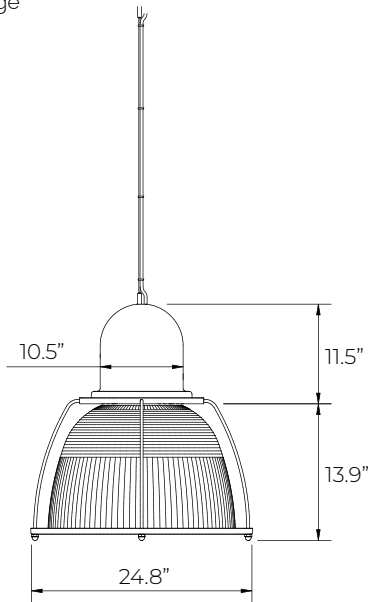

DT  
Dome Top

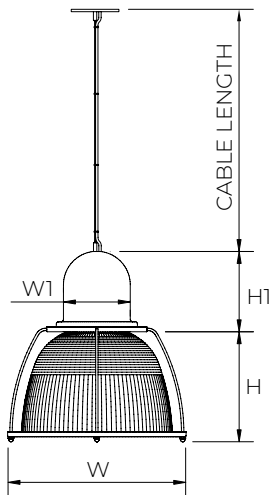

RT  
Round Top

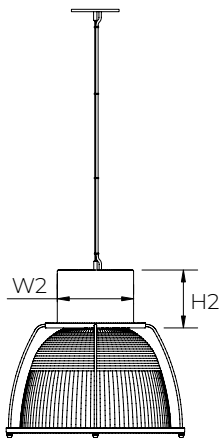

|        | W      | W1     | W2     | W3     | H     | H1    | H2   | H3   |
|--------|--------|--------|--------|--------|-------|-------|------|------|
| Small  | Ø14.9" | Ø5.5"  | Ø6.0"  | Ø6.0"  | 8.1"  | 7.3"  | 7.0" | 2.0" |
| Medium | Ø18.7" | Ø7.0"  | Ø8.0"  | Ø8.0"  | 11.5" | 8.4"  | 7.0" | 2.0" |
| Large  | Ø24.8" | Ø10.5" | Ø12.0" | Ø12.0" | 13.9" | 11.5" | 8.0" | 2.5" |



PACE Illumination 5500 West 111<sup>th</sup> Street | Oak Lawn, Illinois 60453 | 708-499-1700 | [quotes@paceillumination.com](mailto:quotes@paceillumination.com)

Although PACE has prepared the information contained in this document with all due care, PACE does not warrant or represent that the information is free from errors or omission. Whilst the information is considered to be true and correct at the date of publication, changes in circumstances after the time of publication may impact on the accuracy of the information. The information may change without notice and PACE is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

In the interest of product improvement, Pace reserves the right to make technical and product specification changes without notice. Consult factory for voltage and other lamp options.

REV DATE:  
11-03-2025