

NIMBUS

HPHV- High performance high ventilated.



PROJECT

DATE

COMMENTS

STANDARD FEATURES

- Newly redesigned heavy-gauge spun aluminum upper structure that enhances airflow with stylish top.
- Housing UV Stabilized Acrylic Reflector.
- All Hardware Stainless Steel.
- Dimming Driver



SERIES	MODEL	SIZE	STYLE	LAMP LED	LUMENS	CCT CRI 80	VOLT	CONTROL	COLOR	MOUNTING	OPTIONS	
HPHV	600	22"	HV= High Ventilated.	240W	36000	K27 = 2700K. K3 = 3000K. K35 = 3500K. K4 = 4000K. K5 = 5000K.	120/277 UNV	DD = 0-10V Dimming Driver.	TAL = Textured Aluminum. TBK = Textured Black. TBZ = Textured Bronze. TWH = Textured White. CC = Custom Color. RAL = RAL Color.	ACBXX = Aircraft Cable Black Cord & Canopy, Specify Length. ACWXX = Aircraft Cable White, Cord And Canopy, Specify Length. SMXX = Stem & Canopy, Specify Length. HHCP = Hook Hanger.	PCR = Polycarbonate Reflector. WG = Wire Guard. SC30 = 30° Hang Straight. MS = Motion Sensor.	
				300W	39000							
				400W	52000							
				500W	65000							
ORDERING INFORMATION												
SERIES	MODEL	SIZE	STYLE	LAMP LED	LUMENS	CCT CRI 80	VOLT	CONTROL	COLOR	MOUNTING	OPTIONS	

ORDERING EXAMPLE: HPHV - 600 - 22 - HV - 500W - 39000 - K4 - 277 - DD - TAL - ACB48" - WG.

Consult factory for voltage and other lamp options. Product specifications subject to change without notice.

1. Programmable drivers at the PACE factory
2. Color tunable
3. Capable of remote dimming
4. Can be equipped with motion sensors for on/off functioning
5. Can be equipped with light sensors for dusk-to-dawn automatic on/off operation
6. Bluetooth commissioning sensor capability for Android and iOS



PACE Illumination 5500 West 111th Street | Oak Lawn, Illinois 60453 | 708-499-1700 | quotes@paceillumination.com

Although PACE has prepared the information contained in this document with all due care, PACE does not warrant or represent that the information is free from errors or omission. Whilst the information is considered to be true and correct at the date of publication, changes in circumstances after the time of publication may impact on the accuracy of the information. The information may change without notice and PACE is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

In the interest of product improvement, Pace reserves the right to make technical and product specification changes without notice. Consult factory for voltage and other lamp options.

REV DATE:
11-03-2025

NIMBUS

HPHV- High performance high ventilated.




MOUNTING

- Air craft cable and stem standard


COLOR

- Textured or smooth polyester powder coat finishes
- RAL colors available

DIMENSIONS

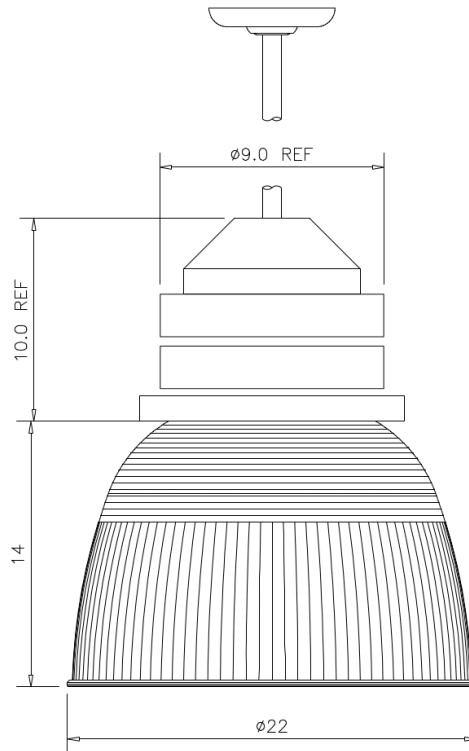

COMPONENT IDENTIFICATION

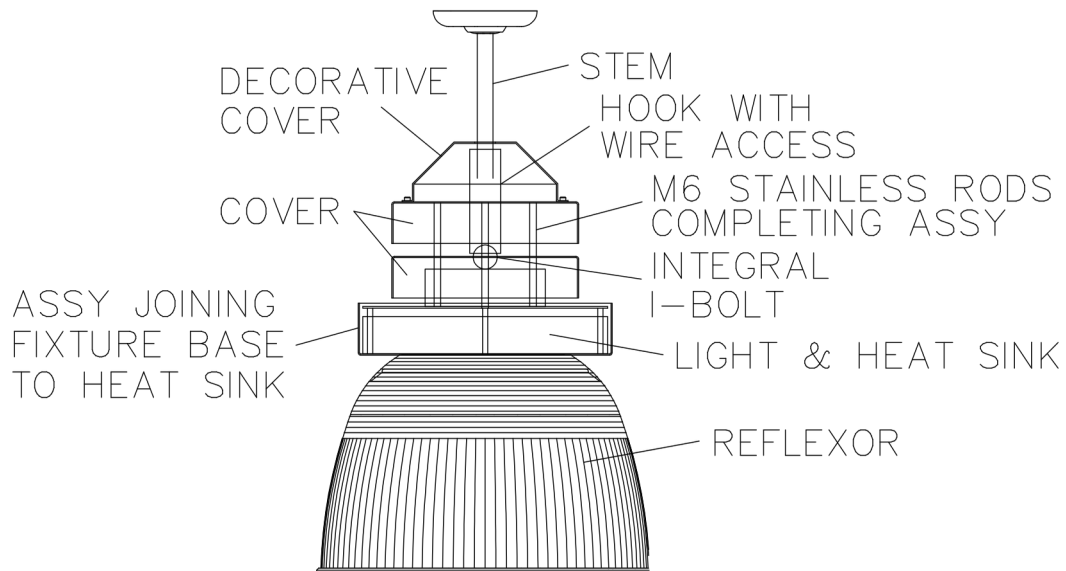

PACE Illumination 5500 West 111th Street | Oak Lawn, Illinois 60453 | 708-499-1700 | quotes@paceillumination.com

Although PACE has prepared the information contained in this document with all due care, PACE does not warrant or represent that the information is free from errors or omission. Whilst the information is considered to be true and correct at the date of publication, changes in circumstances after the time of publication may impact on the accuracy of the information. The information may change without notice and PACE is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

In the interest of product improvement, Pace reserves the right to make technical and product specification changes without notice. Consult factory for voltage and other lamp options.

REV DATE:
11-03-2025