

NIMBUS

HPAL - Pendant



PROJECT DATE

COMMENTS

STANDARD FEATURES

- Heavy Gauge Spun Aluminum Housing
- UV Stabilized Acrylic Reflector
- All Hardware Stainless Steel
- Dimming Driver



SERIES	MODEL	SIZE	STYLE	LAMP LED	LUMENS	CCT CRI 80	VOLT	CONTROL	COLOR	MOUNTING	OPTIONS
HPAL	500	812	DT = Dome Top	35W	4600	K27 = 2700K K3 = 3000K K35 = 3500K K4 = 4000K K5 = 5000K	120/277 UNV	DD = 0-10V Dimming Driver	TAL = Textured Aluminum TBK = Textured Black TBZ = Textured Bronze TWH = Textured White CC = Custom Color RAL = RAL Color	ACBXX = Aircraft Cable Black Cord & Canopy, Specify Length ACWXX = Aircraft Cable White Cord And Canopy, Specify Length SMXX = Stem & Canopy, Specify Length HHCP = Hook Hanger	CFL = Clear Flat Lens SFL = Satinice Flat Lens PCR = Polycarbonate Reflector SC30 = 30° Hang Straight MS = Motion Sensor
		816	RT = Round Top	50W	5440						
		822		100W	15000						
				150W	22500						
				200W	30000						
				240W	36000						
				300W	39000						
				400W	52000						
				500W	65000						

ORDERING INFORMATION											
SERIES	MODEL	SIZE	STYLE	LAMP LED	LUMENS	CCT CRI 80	VOLT	CONTROL	COLOR	MOUNTING	OPTIONS

ORDERING EXAMPLE: HPAL – 500 – 822 – DT – 100W – 15000 – K4 – 120/277 – DD – TAL – SM24” – PCR

Consult factory for voltage and other lamp options. Product specifications subject to change without notice.

1. Programmable drivers at the PACE factory

2. Color tunable

3. Capable of remote dimming
4. Can be equipped with motion sensors for on/off functioning

5. Can be equipped with light sensors for dusk-to-dawn automatic on/off operation

6. Bluetooth commissioning sensor capability for Android and iOS

NIMBUS

HPAL - Pendant




MOUNTING

- Air craft cable and stem standard

COLOR

- Textured or smooth polyester powder coat finishes
- RAL colors available

DIMENSIONS

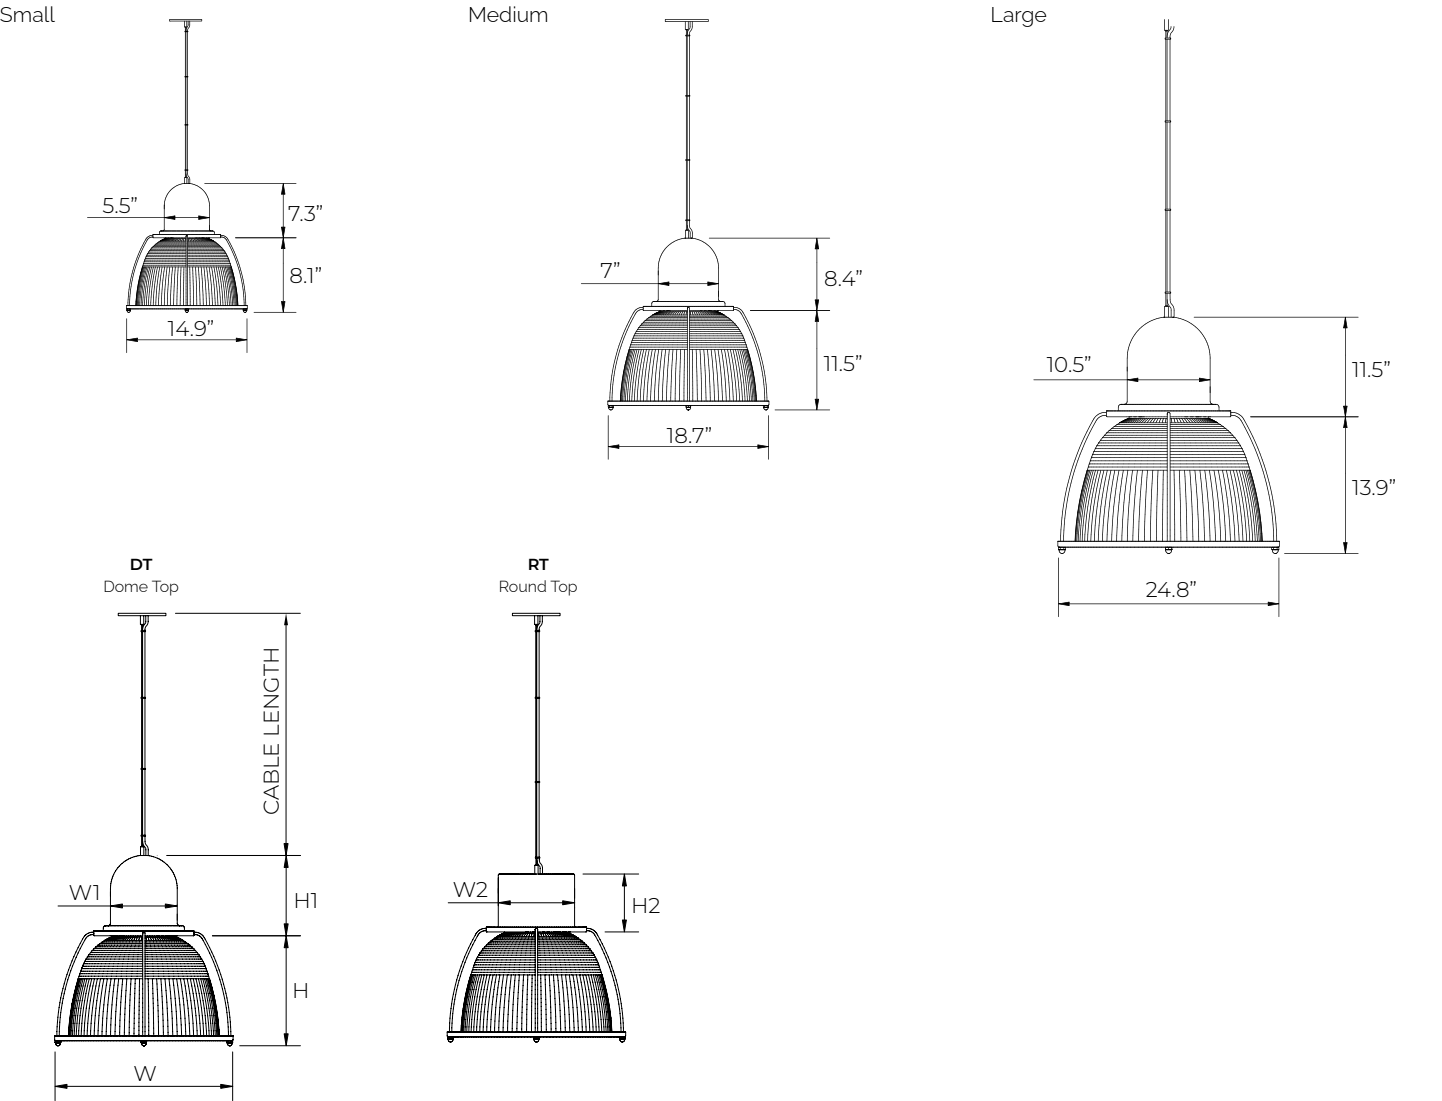

	W	W1	W2	W3	H	H1	H2	H3
Small	Ø14.9"	Ø5.5"	Ø6.0"	Ø6.0"	8.1"	7.3"	7.0"	2.0"
Medium	Ø18.7"	Ø7.0"	Ø8.0"	Ø8.0"	11.5"	8.4"	7.0"	2.0"
Large	Ø24.8"	Ø10.5"	Ø12.0"	Ø12.0"	13.9"	11.5"	8.0"	2.5"