## **NIMBUS**

HPHV- High performance high ventilated.



**PROJECT** DATE

**COMMENTS** 

#### STANDARD FEATURES

- Newly redesigned heavy-gauge spun aluminum upper structure that enhances airflow with stylish top.
- Housing UV Stabilized Acrylic Reflector.
- All Hardware Stainless Steel.
- **Dimming Driver**













SERIES	MODEL	SIZE	STYLE	LAMP LED	LUMENS	CCT CRI 80	VOLT	CONTROL	COLOR	MOUNTING	OPTIONS
НРНУ	600	22"	<b>HV=</b> High Ventilated.	240W 300W* 400W* 500W*	36000 39000 52000 65000	<b>K27</b> =2700K <b>K3</b> =3000K <b>K3</b> =3500K <b>K4</b> =4000K <b>K5</b> =5000K	120/277 UNV	<b>DD =</b> 0-10V Dimming Driver.	TAL = Textured Aluminum. TBK = Textured Black. TBZ = Textured Bronze. TWH = Textured White. CC = Custom Color.		
ORDERING INFORMATION											
SERIES	MODEL	SIZE	STYLE	LAMP LED	LUMENS	CCT CRI 80	VOLT	CONTROL	COLOR	MOUNTING	OPTIONS

**ORDERING EXAMPLE:** HPHV - 600 - 22 - HV - 500W - 39000 - K4 - 277 - DD - TAL - ACB48\* - WG. supplied with aluminum reflector

Consult factory for voltage and other lamp options. Product specifications subject to change without notice.

- Programmable drivers at the PACE factory
- Color tunable
- Capable of remote dimming

Can be equipped with motion sensors for on/off functioning Can be equipped with light sensors for dusk-to-dawn automatic on/off operation 5. 6.





## **NIMBUS**

# HPHV- High performance high ventilated.




#### MOUNTING

 Air craft cable and stem standard


#### COLOR

- Textured or smooth polyester powder coat finishes
- RAL colors available

#### **DIMENSIONS**

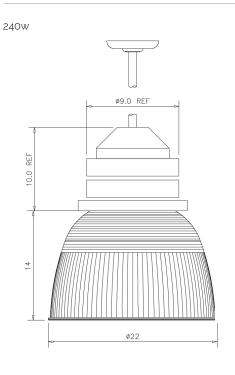

300w, 400w and 500w Aluminum Reflector



### COMPONENT IDENTIFICATION

