# **NIMBUS II**

HPII - Pendant



DATE **PROJECT** 

COMMENTS

## STANDARD FEATURES

- Heavy Gauge Spun Aluminum Housing
- UV Stabilized Acrylic Reflector
- All Hardware Stainless Steel
- Dimming Driver















SERIES	MODEL	SIZE	LAMP LED	LUMENS	CCT CRI 80	VOLT	CONTROL	COLOR	MOUNTING	OPTIONS	SPECIFIC OPTIONS
НРШ	500	812 816	35W to 70W	4000 to 9000	K27 = 2700K K3 = 3000K K35 = 3500K K4 = 4000K K5 = 5000K	120/277 UNV	DD = 0-10V Dimming Driver	TAL = Textured Aluminum TBK = Textured Black TBZ = Textured Bronze TWH = Textured White CC = Custom Color RAL = RAL Color		CFL= Clear Flat Lens SFL=Satinice Flat Lens PCR = Polycarbonate Reflector	MS = Motion Sensor  SC30 = 30° Hang Straight  PCL = Prismatic Conical Lens  GDR = Glass Disc & Rod Frame  ADR = Acrylic Disc & Rod Frame  PDR = Perforated Disc & Rod Frame  DBR = Rod Frame Assembly & Decorative Band  KDB = Konstrukt Frame & Decorative Band  KNST = Konstrukt Frame Assembly & Disc
ORDERING INFORMATION											
SERIES	MODEL	SIZE	LAMP LED	LUMENS	CCT CRI 80	VOLT	CONTROL	COLOR	MOUNTING	OPTIONS	SPECIFIC OPTIONS

ORDERING EXAMPLE: HPII - 500 - 812 - 40W - 4500 - K4 - 120/277 - DD - TAL - SM20" - PCR

Consult factory for voltage and other lamp options. Product specifications subject to change without notice.

- Programmable drivers at the PACE factory Color tunable
- Capable of remote dimming

- Can be equipped with motion sensors for on/off functioning Can be equipped with light sensors for dusk-to-dawn automatic on/off operation Bluetooth commissioning sensor capability for Android and iOS



# **NIMBUS II**

## HPII - Pendant




## MOUNTING


Air craft cable and cord standard

## COLOR


- Textured or smooth polyester powder coat finishes
- · RAL colors available

## **DIMENSIONS**

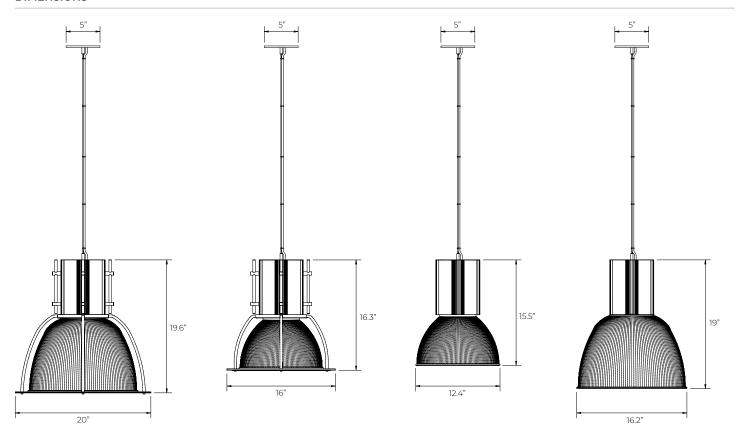



Clear Acrylic Lens



Metal Perforated Disc

