## **NIMBUS**

HPHV- High performance high ventilated.



**PROJECT** DATE

**COMMENTS** 

#### STANDARD FEATURES

- Newly redesigned heavy-gauge spun aluminum upper structure that enhances airflow with stylish top.
- Housing UV Stabilized Acrylic Reflector.
- All Hardware Stainless Steel.
- **Dimming Driver**















SERIES	MODEL	SIZE	STYLE	LAMP LED	LUMENS	CCT CRI 80	VOLT	CONTROL	COLOR	MOUNTING	OPTIONS
НРНУ	600	22"	<b>HV=</b> High Ventilated.	240W 300W 400W 500W	36000 39000 52000 65000	<b>K27</b> = 2700K, <b>K3</b> = 3000K, <b>K35</b> = 3500K, <b>K4</b> = 4000K, <b>K5</b> = 5000K.	120/277 UNV	Driver.	TAL = Textured Aluminum. TBK = Textured Black. TBZ = Textured Bronze. TWH = Textured White. CC = Custom Color. RAL = RAL Color.	ACBXX = Aircraft Cable Black Cord & Canopy, Specify Length. ACWXX = Aircraft Cable White, Cord And Canopy, Specify Length.	PCR = Polycarbonate Reflector. WG = Wire Guard. SC30 = 30° Hang Straight. MS = Motion Sensor.
									RML - IVIL COIDI.	SMXX = Stem & Canopy, Specify Length. HHCP = Hook Hanger.	
ORDERING INFORMATION											
SERIES	MODEL	SIZE	STYLE	LAMP LED	LUMENS	CCT CRI 80	VOLT	CONTROL	COLOR	MOUNTING	OPTIONS

**ORDERING EXAMPLE:** HPHV - 600 - 22 - HV - 500W - 39000 - K4 - 277 - DD - TAL - ACB48" - WG.

Consult factory for voltage and other lamp options. Product specifications subject to change without notice.

- Programmable drivers at the PACE factory
- Color tunable
- Capable of remote dimming

- Can be equipped with motion sensors for on/off functioning Can be equipped with light sensors for dusk-to-dawn automatic on/off operation
- 5. 6. Bluetooth commissioning sensor capability for Android and iOS



## **NIMBUS**

# HPHV- High performance high ventilated.




#### MOUNTING

 Air craft cable and stem standard

#### COLOR

- Textured or smooth polyester powder coat finishes
- · RAL colors available

#### **DIMENSIONS**

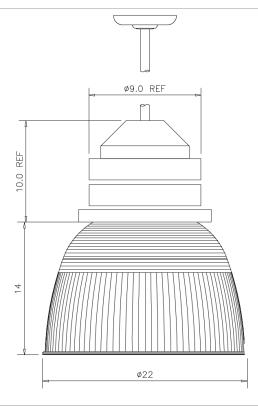

### COMPONENT IDENTIFICATION

