

# NIMBUS

## HPML - Pendant

PROJECT

DATE

COMMENTS

### STANDARD FEATURES

- Heavy-gauge spun aluminum housing and reflector.
- Powder coated.
- All hardware is stainless steel.
- Dimming driver.



SERIES	MODEL	SIZE	STYLE	LAMP LED	LUMENS	CCT CRI 80	VOLT	CONTROL	COLOR	MOUNTING	OPTIONS
HPML	500	812	DT= Dome-top	35W	4600	K27 = 2700K	120/277 UNV	DD = 0-10V Dimming Driver.	TAL=Textured Aluminum	ACBXX = Aircraft Cable Black Cord & Canopy, Specify Length ACWXX = Aircraft Cable White, Cord And Canopy, Specify Length. SMXX = Stem & Canopy, Specify Length. HHCP = Hook Hanger.	SC30 = 30° Hang Straight
					K3 = 3000K	TBK= Textured Black					
					K35 = 3500K	TBZ= Textured Bronze					
					K4 = 4000K	TWH= Textured White					
					K5 = 5000K	CC= Custom Color					
						RAL= RAL Color					
ORDERING INFORMATION											
SERIES	MODEL	SIZE	STYLE	LAMP LED	LUMENS	CCT CRI 80	VOLT	CONTROL	COLOR	MOUNTING	OPTIONS

ORDERING EXAMPLE: HPML - 500 - 812 - DT - 35W - 4600 - K4 - 120/277 - DD - TBK - SM36 - SC30

Consult factory for voltage and other lamp options. Product specifications subject to change without notice.

- |   |   |
|---|---|
| 1. Programmable drivers at the PACE factory | 4. Can be equipped with motion sensors for on/off functioning                     |
| 2. Color tunable                            | 5. Can be equipped with light sensors for dusk-to-dawn automatic on/off operation |
| 3. Capable of remote dimming                | 6. Bluetooth commissioning sensor capability for Android and iOS                  |



PACE Illumination 5500 West 111th Street | Oak Lawn, Illinois 60453 | 708-499-1700 | quotes@paceillumination.com

Although PACE has prepared the information contained in this document with all due care, PACE does not warrant or represent that the information is free from errors or omission. Whilst the information is considered to be true and correct at the date of publication, changes in circumstances after the time of publication may impact on the accuracy of the information. The information may change without notice and PACE is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

In the interest of product improvement, Pace reserves the right to make technical and product specification changes without notice. Consult factory for voltage and other lamp options.

REV DATE:  
11-10-2025

# NIMBUS

## HPML - Pendant



### MOUNTING

- Aircraft cable and stem standard


### COLOR

- Textured or smooth polyester powder coat finishes
- RAL colors available
- Custom color combination available.

### DIMENSIONS

#### DT

Dome Top

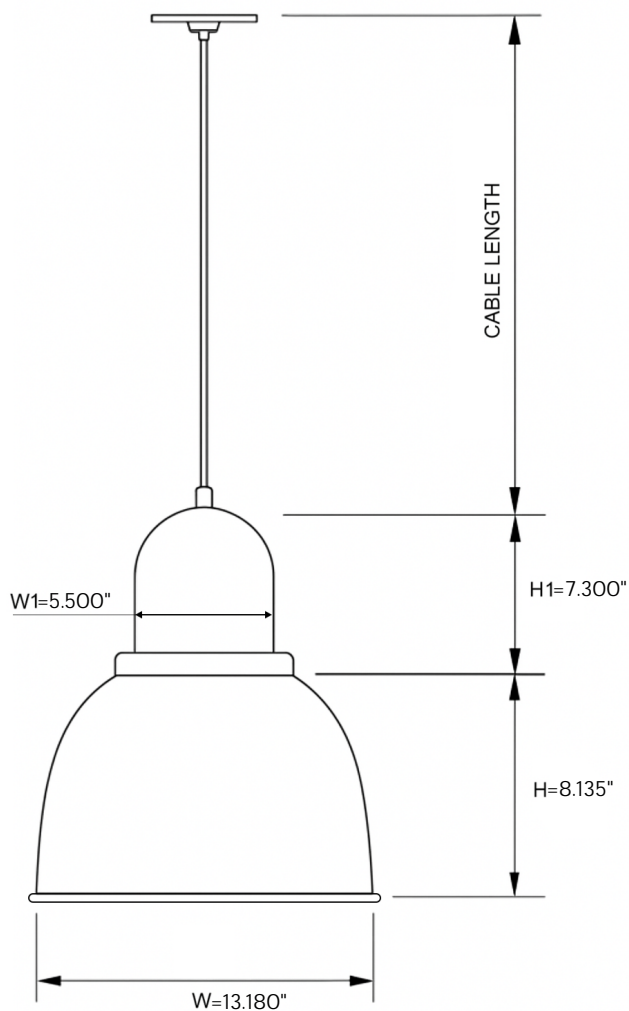

**PACE Illumination** 5500 West 111th Street | Oak Lawn, Illinois 60453 | 708-499-1700 | [quotes@paceillumination.com](mailto:quotes@paceillumination.com)

Although PACE has prepared the information contained in this document with all due care, PACE does not warrant or represent that the information is free from errors or omission. Whilst the information is considered to be true and correct at the date of publication, changes in circumstances after the time of publication may impact on the accuracy of the information. The information may change without notice and PACE is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

In the interest of product improvement, Pace reserves the right to make technical and product specification changes without notice. Consult factory for voltage and other lamp options.

**REV DATE:**  
11-10-2025