PAMPAS

TPBM - Bollard



DATE **PROJECT**

COMMENTS

STANDARD FEATURES

- Classic Architectural Design
- Heavy Gauge Construction Suitable for Outdoor Environments
- Extruded And Laser Cut Aluminum Housing
- Milky White Acrylic Lens
- Applications Landscapes / Pedestrian Paths













SERIES	MODEL	OAH HEIGHT	LAMP	LUMENS	CCT CRI 80	VOLT	CONTROL	COLOR	OPTIONS
ТРВМ	4000	36 = 36" 42 = 42" CC = Custom Height	LED	1500 to 4000	K27 = 2700K K3 = 3000K K35 = 3500K K4 = 4000K K5 = 5000K	120/277 UNV	DD = 0-10V Dimming Driver	TAL = Textured Aluminum TBK = Textured Black TBZ = Textured Bronze TWH = Textured White CC = Custom Color	GFIR = Ground Fault and Receptacle PE = Photocell EM = Emergency Backup MS = Motion Sensor
SERIES	MODEL	OAH HEIGHT	LAMP	LUMENS	ORDERIN	NG INFORM	1ATION CONTROL	RAL = RAL Color COLOR	OPTIONS

ORDERING EXAMPLE: TPBM - 4000 - CC52" - LED - 3500 - K4 - 120/277 - DD - TBK

Consult factory for voltage and other lamp options. Product specifications subject to change without notice.

- Programmable drivers at the PACE factory Color tunable
- Capable of remote dimming

- Can be equipped with motion sensors for on/off functioning Can be equipped with light sensors for dusk-to-dawn automatic on/off operation Bluetooth commissioning sensor capability for Android and iOS



Although PACE has prepared the information contained in this document with all due care, PACE does not warrant or represent that the information is free from errors or omission.

PAMPAS

TPBM - Bollard



SIZES

- 10.5" square standard
- Custom sizes available consult factory


MOUNTING

- Bollard pedestal mount
- Two standard pedestal heights 36" or 42" OAH

COLOR

- Textured or smooth polyester powder coat finishes
- · RAL colors available

DIMENSIONS

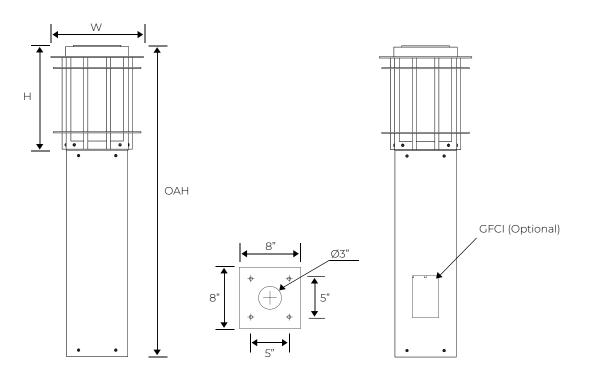

W	н	ОАН
10.5" × 10.5"	11.9"	36.0" or 42.0"

