

RONDELLA

ROND 1 - Flat Top



PROJECT DATE

COMMENTS

STANDARD FEATURES

- Heavy Gauge Spun Aluminum Flat Top Housing
- High Performance Optical System



SERIES	MODEL	SIZE	LAMP	LUMENS	CCT CRI 80	VOLT	CONTROL	COLOR	BEAM ANGLE	MOUNTING	OPTIONS
ROND1	1690	L = 20" Diameter	LED	5000 to 65000	K27 = 2700K K3 = 3000K K35 = 3500K K4 = 4000K K5 = 5000K	120-277V UNV	DD = 0-10V Dimming Driver	TAL = Textured Aluminum TBK = Textured Black TBZ = Textured Bronze TWH = Textured White CC = Custom Color RAL = RAL Color	60 = 60° Angle 90 = 90° Angle 120 = 120° Angle	WM = Wall Mount PAM = Pole Arm Mount PAM2/180 = 2 Arms at 180° PAM2/90 = 2 Arms at 90° PAM3/120 = 3 Arms at 120° PAM4/90 = 4 Arms at 90°	MS = Motion Sensor PE1 = Photocell 120V PE2 = Photocell 277V
ORDERING INFORMATION											
SERIES	MODEL	SIZE	LAMP	LUMENS	CCT CRI 80	VOLT	CONTROL	COLOR	BEAM ANGLE	MOUNTING	OPTIONS

ORDERING EXAMPLE: ROND1 - 1690 - L - LED - 22500 - K4 - 120/277 - DD - TWH - 90 - PAM - PE1

Consult factory for voltage and other lamp options. Product specifications subject to change without notice.

1. Programmable drivers at the PACE factory

2. Color tunable

3. Capable of remote dimming
4. Can be equipped with motion sensors for on/off functioning

5. Can be equipped with light sensors for dusk-to-dawn automatic on/off operation

6. Bluetooth commissioning sensor capability for Android and iOS

RONDELLA

ROND 1 - Flat Top



SIZES

- 20" diameter


MOUNTING

- Yoke mount, Wall mount, Pole arm mount
- See technical data sheets for details

COLOR

- Textured or smooth polyester powder coat finishes
- RAL colors available

DIMENSIONS

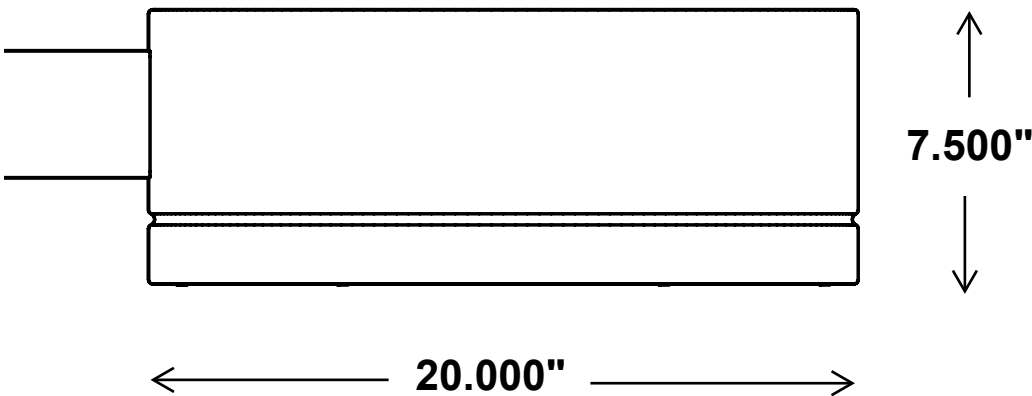

MOUNTING CONFIGURATIONS

