CILINDRO

EUDC III - Wall Mount.



PROJECT DATE

COMMENTS

STANDARD FEATURES

- Heavy Gauge Spun Aluminum Housing.
- Clear Flat Lens Standard.
- Down or Up&Down LED light.
- Outdoor Waterproof IP65.
- Efficacy, 129 lumens/ watt, (10w to 100w).















SERIES	MODEL	SIZE	LAMP	LUMENS	ССТ	VOLT	CONTROL	COLOR	MOUNTING	OPTIONS
EUDC-WM	III	6 = 6" Diam.	LED		K27 = 2700K K3 = 3000K K35 = 3500K K4 = 4000K K5 = 5000K	120/277 UNV	DD= 0-10V Dimming driver	TBK= Textured-Black CC = Custom Color RAL = RAL Color	DL= Downlight U/D= Up& Downlight	MS = Motion Sensor. EM = Emergency Backup. PE1 = Photocell 120V. PE2 = Photocell 277V.
					OF	DERING IN	FORMATION			
SERIES	MODEL	SIZE	LAMP	LUMENS	сст	VOLT	CONTROL	COLOR	MOUNTING	OPTIONS

Consult factory for voltage and other lamp options. Product specifications subject to change without notice.

- Programmable drivers at the PACE factory Color tunable
- Capable of remote dimming

- Can be equipped with motion sensors for on/off functioning Can be equipped with light sensors for dusk-to-dawn automatic on/off operation Bluetooth commissioning sensor capability for Android and iOS 4. 5. 6.



CILINDRO

EUDC III - Wall Mount.



SIZES

• 6" diameter

MOUNTING


- Formed aluminum arm with wall plate
- Mounts to standard 4" J-Box

COLOR

- Textured or smooth polyester powder coat finishes RAL colors available

DIMENSIONS

U/D Wall Arm

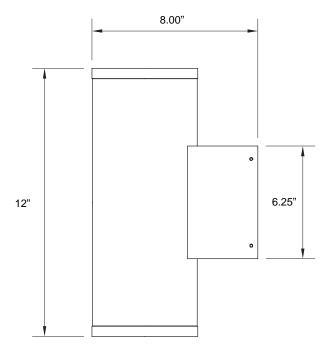

Down Light

