RONDELLA

ROND 1 - Flat Top



PROJECT DATE

COMMENTS

STANDARD FEATURES

- Heavy Gauge Spun Aluminum Flat Top Housing
- High Performance Optical System













| SERIES | MODEL | SIZE | LAMP | LUMENS | CCT CRI 80 | VOLT | CONTROL | COLOR | BEAM ANGLE | MOUNTING | OPTIONS |
|----------------------|-------|------------------|------|---------------|---|--------------|-------------------------------------|---|---|---|--|
| ROND1 | 1690 | L = 20" Diameter | LED | 5000 to 65000 | K27 = 2700K K3 = 3000K K35 = 3500K K4 = 4000K K5 = 5000K | 120-277V UNV | DD = 0-10V Dimming Driver | TAL = Textured Aluminum TBK = Textured Black TBZ = Textured Bronze TWH = Textured White CC = Custom Color RAL = RAL Color | 60 = 60° Angle 90 = 90° Angle 120 = 120° Angle | WM = Wall Mount PAM = Pole Arm Mount PAM2/180 = 2 Arms at 180° PAM2/190 = 2 Arms at 90° PAM3/120 = 3 Arms at 120° PAM4/90 = 4 Arms at 90° | MS = Motion Sensor PE1 = Photocell 120V PE2 = Photocell 277V |
| ORDERING INFORMATION | | | | | | | | | | | |
| SERIES | MODEL | SIZE | LAMP | LUMENS | CCT CRI 80 | VOLT | CONTROL | COLOR | BEAM ANGLE | MOUNTING | OPTIONS |
| | | | | | | | | | | | |

ORDERING EXAMPLE: ROND1 - 1690 - L - LED - 22500 - K4 - 120/277 - DD - TWH - 90 - PAM - PE1

Consult factory for voltage and other lamp options. Product specifications subject to change without notice.

- Programmable drivers at the PACE factory Color tunable
- Capable of remote dimming

- Can be equipped with motion sensors for on/off functioning
- Can be equipped with light sensors for dusk-to-dawn automatic on/off operation Bluetooth commissioning sensor capability for Android and iOS



RONDELLA

ROND 1 - Flat Top



SIZES

· 20" diameter


MOUNTING

- Yoke mount, Wall mount, Pole arm mount
- See technical data sheets for details

COLOR

- Textured or smooth polyester powder coat finishes
- · RAL colors available

DIMENSIONS

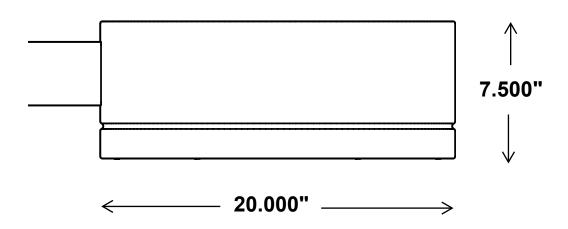

MOUNTING CONFIGURATIONS

