

NIMBUS

HPDL - Pendant

PROJECT

DATE

COMMENTS

STANDARD FEATURES

- Heavy Gauge Spun Aluminum Housing
- UV Stabilized Acrylic Reflector
- All Hardware Stainless Steel
- Dimming Driver



SERIES	MODEL	SIZE	STYLE	LAMP LED	LUMENS	CCT CRI 80	VOLT	CONTROL	COLOR	MOUNTING	OPTIONS
HPDL	500	812	DT = DomeTop	35W	4600	K27 = 2700K	120/277 UNV	DD = 0-10V Dimming Driver.	TAL=Textured Aluminum TBK= Textured Black TBZ= Textured Bronze TWH= Textured White CC= Custom Color RAL= RAL Color	ACBXX = Aircraft Cable Black Cord & Canopy, Specify Length ACWXX = Aircraft Cable White, Cord And Canopy, Specify Length. SMXX = Stem & Canopy, Specify Length. HHCP = Hook Hanger.	CFL = Clear Flat Lens SFL=Satinice Flat Lens PCR = Polycarbonate Reflector WG = Wire Guard SC30 = 30° Hang Straight MS = Motion Sensor
		816	RT = Round Top	50W	5440	K3 = 3000K					
		822		100W	15000	K35 = 3500K					
				150W	22500	K4 = 4000K					
				200W	30000	K5 = 5000K					
				SEL = Selectable*		SEL = Selectable*					
ORDERING INFORMATION											
SERIES	MODEL	SIZE	STYLE	LAMP LED	LUMENS	CCT CRI 80	VOLT	CONTROL	COLOR	MOUNTING	OPTIONS

ORDERING EXAMPLE: HPDL - 500 - 822 - DT - 100W - 15000 - K4 - 120/277 - DD - TAL - ACB48" - PCR

*Feature available for the 822 size only

Consult factory for voltage and other lamp options. Product specifications subject to change without notice.

1. Programmable drivers at the PACE factory
2. Color tunable
3. Capable of remote dimming
4. Can be equipped with motion sensors for on/off functioning
5. Can be equipped with light sensors for dusk-to-dawn automatic on/off operation
6. Bluetooth commissioning sensor capability for Android and iOS



PACE Illumination 5500 West 111th Street | Oak Lawn, Illinois 60453 | 708-499-1700 | quotes@paceillumination.com

Although PACE has prepared the information contained in this document with all due care, PACE does not warrant or represent that the information is free from errors or omission. Whilst the information is considered to be true and correct at the date of publication, changes in circumstances after the time of publication may impact on the accuracy of the information. The information may change without notice and PACE is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

In the interest of product improvement, Pace reserves the right to make technical and product specification changes without notice. Consult factory for voltage and other lamp options.

REV DATE:
08-05-2026

NIMBUS

HPDL - Pendant



OPTIONAL FEATURE

CCT & Wattage Selectable


Model	3 Wattage Selectable			3 CCT Selectable
	A	B	C	
150W	150W	100W	80W	6000K / 5000K / 4000K / 3000K
200W	200W	150W	100W	
240W	240W	200W	150W	

Power	Lumen	Voltage	Beam Angle	CCT	CRI	IP Grade
60W	9000lm	AC100-277V / AC200-528V	60° 90° 120°	2700K-6500K	>80	IP65
100W	15000lm	AC100-277V / AC200-528V	60° 90° 120°	2700K-6500K	>80	IP65
150W	22500lm	AC100-277V / AC200-528V	60° 90° 120°	2700K-6500K	>80	IP65
200W	30000lm	AC100-277V / AC200-528V	60° 90° 120°	2700K-6500K	>80	IP65
240W	36000lm	AC100-277V / AC200-528V	60° 90° 120°	2700K-6500K	>80	IP65

DIMENSIONS

DT


Dome Top

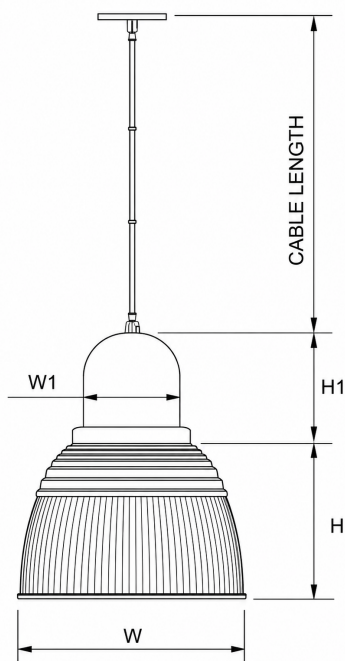

RT

Round Top

- Air craft cable or stem available

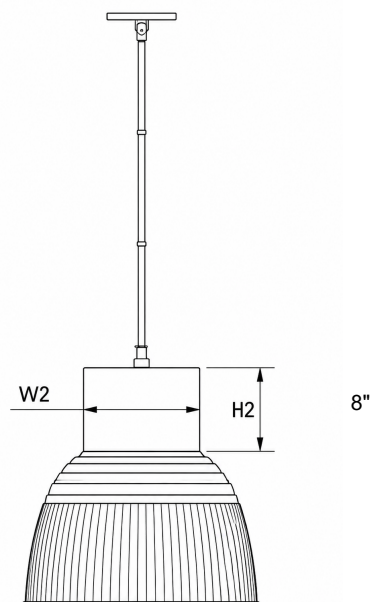

	W	W1	W2	H	H1
Small	Ø12.4"	Ø5.5"	Ø6.0"	7.0"	7.3"
Medium	Ø16.3"	Ø7.0"	Ø8.0"	10.5"	8.4"
Large	Ø22.4"	Ø10.5"	Ø12.0"	12.1"	11.5"



PACE Illumination 5500 West 111th Street | Oak Lawn, Illinois 60453 | 708-499-1700 | quotes@paceillumination.com

Although PACE has prepared the information contained in this document with all due care, PACE does not warrant or represent that the information is free from errors or omission. Whilst the information is considered to be true and correct at the date of publication, changes in circumstances after the time of publication may impact on the accuracy of the information. The information may change without notice and PACE is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

In the interest of product improvement, Pace reserves the right to make technical and product specification changes without notice. Consult factory for voltage and other lamp options.

REV DATE:
08-05-2026