



# AVANTE-GARDE

## AGTE - Tempo

### STANDARD FEATURES

- Homemade heavy gage aluminum housing
- Protected by U.S.P.T.O number D615,241
- Surface or recessed box
- Heat treated glass
- Forward throw or back light stacked louvers available
- Use perforated screen for star burst pattern effects on ceiling or walls



Intertek



SERIES	MODEL	HEIGHT	LAMP	VOLT	LUMENS	CCT	CONTROL	OPTICS	LENS	COLOR	MOUNTING	OPTIONS	
AGTE	6000 1771 441 800 1	S = SMALL	INC = 100 Watt	120V				<b>O</b> = NO OPTICS <b>SL/F</b> = STACKED LOUVER FORWARD^ <b>SL/B</b> = STACKED LOUVER BACK LIT OPTICS^ <b>PEC</b> =PERFORATED COLLAR^^^	<b>HTC</b> = Heat treated clear <b>MWG</b> = Milk white glass^^ <b>RPG</b> = Ribbed prismatic^^ <b>CG</b> = Colored glass (available upon request)	<b>TEXTURED FINISHES</b> <b>TAL</b> = TEXTURED ALUMINUM <b>TBK</b> = TEXTURED BLACK <b>TBZ</b> = TEXTURED BRONZE <b>TWH</b> = TEXTURED WHITE	<b>SF</b> = Surface mount <b>SCE</b> = Surface conduit entry  Additional mounting options available Wall, Ceiling, Bollard, Up, down or up/down	<b>NG</b> = NO GUARD <b>GEC</b> = GLASS END CAP <b>RBBD</b> = RECESSED BALLAST BOX DRYWALL CEILING <b>SCE</b> = SURFACE COUNDUIT ENTRY^^^^	
			PLC = 13,18,26	120-277 UNV									
		L = LARGE	18W/LED	120-277UNV	2500	4000K	0-10V DIM						
			25W/LED	120-277UNV	2700	4000K	0-10V DIM						
			30W/LED	120-277UNV	3900	3000K	0-10V DIM						
				347-480UNV	4000	4000K	0-10V DIM						
					4100	5000K	0-10V DIM						
			50W/LED	120-277UNV	6075	3000K	0-10V DIM						
				347-480UNV	6300	4000K	0-10V DIM						
		6530	5000K	0-10V DIM									

### ORDERING INFORMATION

SERIES	MODEL	HEIGHT	LAMP	VOLT	LUMENS	CCT	CONTROL	OPTICS	LENS	COLOR	MOUNTING	OPTIONS

^ Not available in incandescent lamps / ^^ Only available with "O" optics / ^^^ Use clear lamp only for striation effect / ^^^^^ Surface box with 5 x 1/2" IPS entry hubs available in incandescent only

Consult factory for voltage and other lamp options. Product specifications subject to change without notice.

1. Programmable drivers at the PACE factory
2. Color tunable
3. Capable of remote dimming
4. Can be equipped with motion sensors for on/off functioning
5. Can be equipped with light sensors for dusk-to-dawn automatic on/off operation
6. Bluetooth commissioning sensor capability for Android and iOS

Although PACE has prepared the information contained in this document with all due care, PACE does not warrant or represent that the information is free from errors or omission. Whilst the information is considered to be true and correct at the date of publication, changes in circumstances after the time of publication may impact on the accuracy of the information. The information may change without notice and PACE is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used. In the interest of product improvement, Pace reserves the right to make technical and product specification changes without notice. Consult factory for voltage and other lamp options.



**PACE**  
ILLUMINATION

**AVANTE-GARDE**

AGTE - Tempo

**SIZES**


Small = 4" x 9.5"  
Large = 5" x 11.5"

**MOUNTING**

3/4" IPS stem  
30° swivel canopy

**COLOR**

Textured or smooth polyester powder coat finishes  
RAL colors available

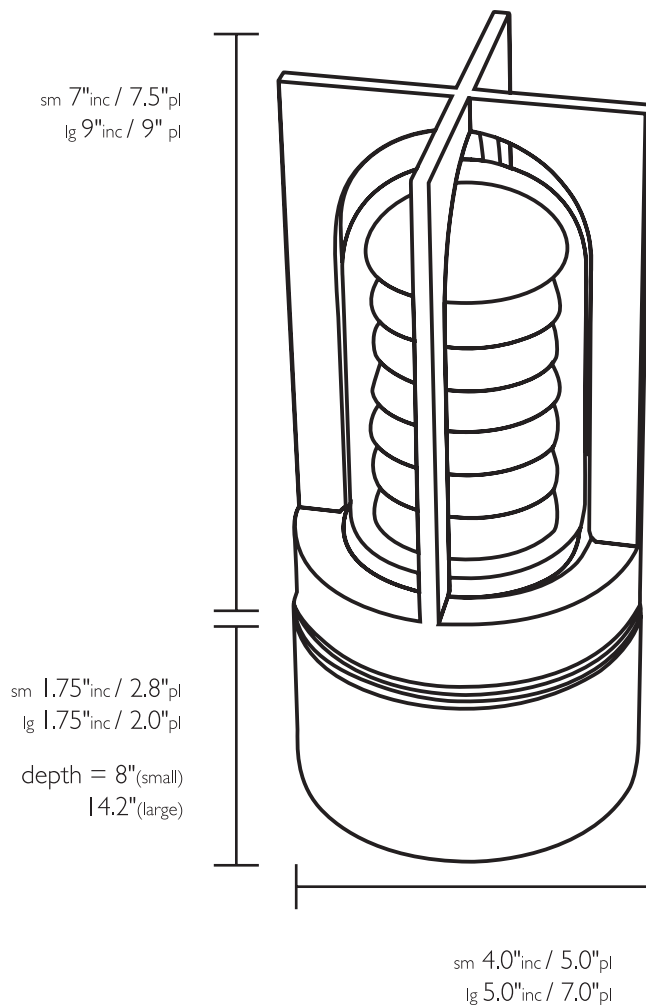

Although PACE has prepared the information contained in this document with all due care, PACE does not warrant or represent that the information is free from errors or omission. Whilst the information is considered to be true and correct at the date of publication, changes in circumstances after the time of publication may impact on the accuracy of the information. The information may change without notice and PACE is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

In the interest of product improvement, Pace reserves the right to make technical and product specification changes without notice. Consult factory for voltage and other lamp options.