



PACE
ILLUMINATION

ROBUSTO

AEQS - quarter sphere

STANDARD FEATURES

- Architectural quarter sphere
- Die-cast aluminum construction
- Die-cast gasketed lens frame
- Clear tempered glass lens
- Optional prismatic lens
- Suitable for up or downlight
- High performance specular optical systems
- Optional pole and bollard mounting available
- HID and compact fluorescent sources



Intertek



SERIES	MODEL	LAMP	VOLT	OPTICS	LUMENS	CCT	CONTROL	COLOR	MOUNTING	OPTIONS
AEQS	1620	LED 35 Watt	120-277V UNV 347-408V UNV	TYPE I TYPE II TYPE III	4000	4000K	0-10 V DIMM	TAL = TEXTURED ALUMINUM TBK = TEXTURED BLACK TBZ = TEXTURED BRONZE TWH = TEXTURED WHITE	WMDL = WALL MOUNT DOWNLIGHT WMUL = WALL MOUNT UPLIGHT BM/S = BOLLARD MOUNT SINGLE PM = POLE MOUNT ^	PHOTO CELL FACTORY INSTALLED PE1 = 120V PE2 = 277V MS = MOTION SENSOR EM = Emergency Backup BT = Bluetooth sensor RD = Remote dimming

ORDERING INFORMATION

SERIES	MODEL	LAMP	VOLT	OPTICS	LUMENS	CCT	CONTROL	COLOR	MOUNTING	OPTIONS

^ Please indicate size of pole when ordering.

Consult factory for voltage and other lamp options. Product specifications subject to change without notice.

1. Programmable drivers at the PACE factory
2. Color tunable
3. Capable of remote dimming
4. Can be equipped with motion sensors for on/off functioning
5. Can be equipped with light sensors for dusk-to-dawn automatic on/off operation
6. Bluetooth commissioning sensor capability for Android and iOS

Although PACE has prepared the information contained in this document with all due care, PACE does not warrant or represent that the information is free from errors or omission. Whilst the information is considered to be true and correct at the date of publication, changes in circumstances after the time of publication may impact on the accuracy of the information. The information may change without notice and PACE is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

In the interest of product improvement, Pace reserves the right to make technical and product specification changes without notice. Consult factory for voltage and other lamp options.



PACE
ILLUMINATION


ROBUSTO

AEQS - quarter sphere


SIZE
15.5" x 8"

MOUNTING
Wall Mount, pole and bollard mounts


COLOR
Textured polyester powder coat finishes

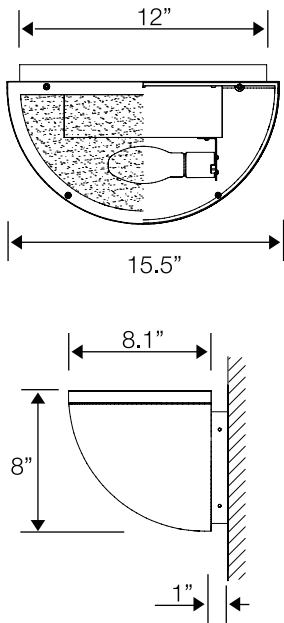

PM = Pole Mount

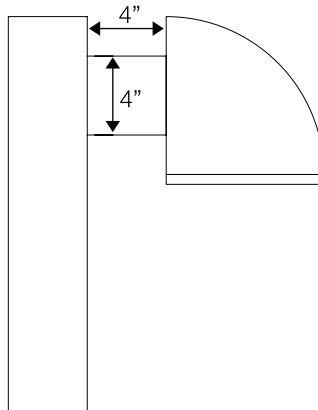


BM/S = bollard mount single

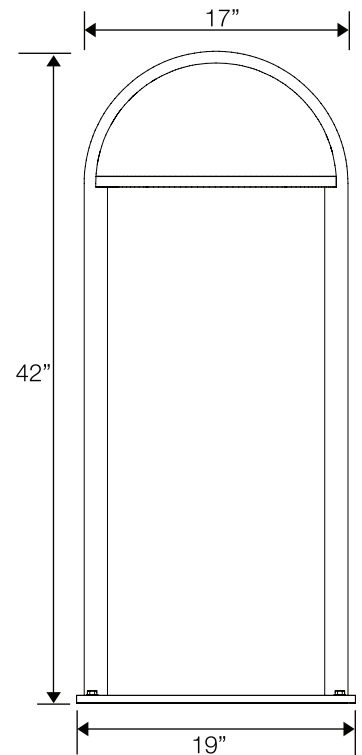

WMUL = wall mount uplight

Bollard base detail

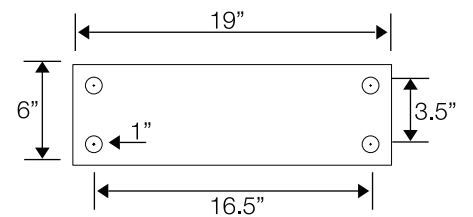

Although PACE has prepared the information contained in this document with all due care, PACE does not warrant or represent that the information is free from errors or omission. Whilst the information is considered to be true and correct at the date of publication, changes in circumstances after the time of publication may impact on the accuracy of the information. The information may change without notice and PACE is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

In the interest of product improvement, Pace reserves the right to make technical and product specification changes without notice. Consult factory for voltage and other lamp options.